


Door Mounting type



Dimension drawing

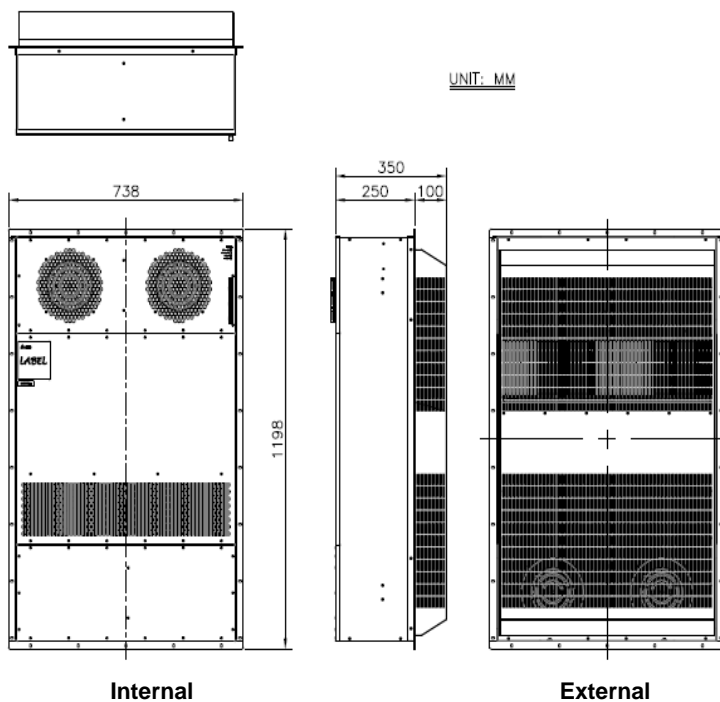

Features

- ◆ IP55 waterproof at external side
- ◆ "One touch" dry run test and dust cleaning
- ◆ Standalone temperature control
- ◆ Clear LED status indicator
- ◆ Dry contact alarm output

Design

- ◆ Air to air heat exchange
- ◆ Rated voltage at 48V
- ◆ Redundant fan quantity design
- ◆ High efficiency and reliable fan
- ◆ Easy installation and maintenance

Main feature	Unit	Specification
Dimension (H x W x D)	mm (inch)	1198 x 738 x 350 (47.1 x 29 x 13.8)
Cooling capacity ^{*Note}	W/K (W/F)	250 (139)
Rated voltage	Vdc	48 (TYP.)
Operating voltage range	Vdc	40 - 60
Rated current	A	12 max.
Power consumption	W	480 max.
Operating temperature range	℃	-20 ~ +65
Internal airflow	CFM	600
External airflow	CFM	650
1.5M sound pressure noise	dB-A	68.0
Weight	Kg	60.0

* Note : The cooling capacity (W/K OR W/℃) is defined as $Q / (T_i - T_A)$

Q : Heat dissipation (W) from inside of cabinet

T_i : Return temperature of internal air circuit (K OR ℃)

T_A : Ambient temperature of external air circuit (K OR ℃)